


CLEARSTREAM™ MICRON

Before attaching the antenna to any surface, TEST RECEPTION in that area.


Connect the antenna to the TV or receiver and run a full channel scan.
If reception is not as desired, move the antenna and rescan/TV receiver.

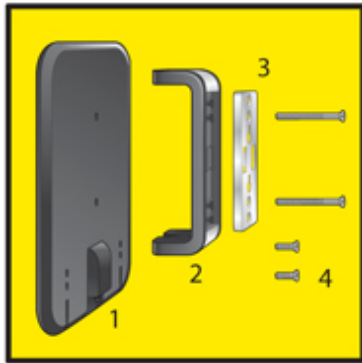

The ClearStream™ Micron comes with:

1. Antenna
2. Stand/mounting bracket
3. Flush mounting bracket
4. Mounting hardware

Table Top Assembly:




1. Place antenna into base as shown in fig 1.

2. Tabs in base will fit into grooves on back plate of antenna. Fig 2.


3. Connect cable to TV or receiver. 4. Perform channel scan on TV or receiver tuner. refer to your TV/receiver owners manual for instructions. 5. If reception is not as desired move antenna and rescan the TV or receiver.

Flush Wall Mount:



1. Remove insert from base at center holes. Fig 3. 2. VMB166LL/A Use insert as a template to mark center mounting holes on wall. Screw hanging screws into the wall and back out far enough to allow insert to attach to wall. 3. To attach insert to antenna, screw short screws provided into the back of the antenna using 2nd holes from top and bottom. Fig 4. 4. Hang antenna on the wall. 5. Connect cable to TV or receiver. 6. Perform channel scan on TV or tuner. Refer to your TV/receivers owners manual for more instructions.

Raised Wall Mount:



1. Remove insert from base at center holes. Fig 3. 2. Use insert as a template to mark center mounting holes on wall. Screw hanging screws into the wall and back out far enough to allow insert to attach to the wall. 4. Reattach insert to base. 5. To attach insert to antenna, screw long screws provided into back of antenna using 2nd holes from top and bottom. Fig 5. 6. Hang antenna on the wall. 7. Connect cable to TV or receiver. 8. Perform channel scan.