

Technical Data Sheet: Antennas Direct C5 Antenna

Physical Data:

Dimensions: Length = 29 in. Width = 23 in. Height = 11.5 in.

Weight: 7.75 lbs.

Turning Radius: 18 in.

Electrical Data:

Band: High VHF 174 to 216 MHz Channels 7 - 13

Impedance: 75 ohm

Connector: F-Female

Performance Data:

VHF:

Peak Gain: 7.63 dBi @ 190 MHz

VSWR: < 2.0 Typical

3.0 Max 174 to 216 MHz

UHF:

Peak Gain: 4.9 dBi



Illustration 1: C5

Notes:

1. Unless stated otherwise, all performance data computed using Remcom, Inc. X-FDTD 7.0 simulator.
2. Assumptions: PEC, free space, no balun. 300 Ohm transmission line reference.
3. Gain is specified dBi (isotropic) per IEEE definition. Balun and mismatch losses not included.
4. There are two common meanings for Front-to-Back Ratio (F/B). One specifies ratio as measured 180 degrees opposite boresight. The other, used by IEEE specifies the ratio of boresight gain to maximum gain in rear hemisphere. The IEEE definition is the most conservative. IEEE F/B values shown here are computed based on azimuth and elevation cuts provided in this document.

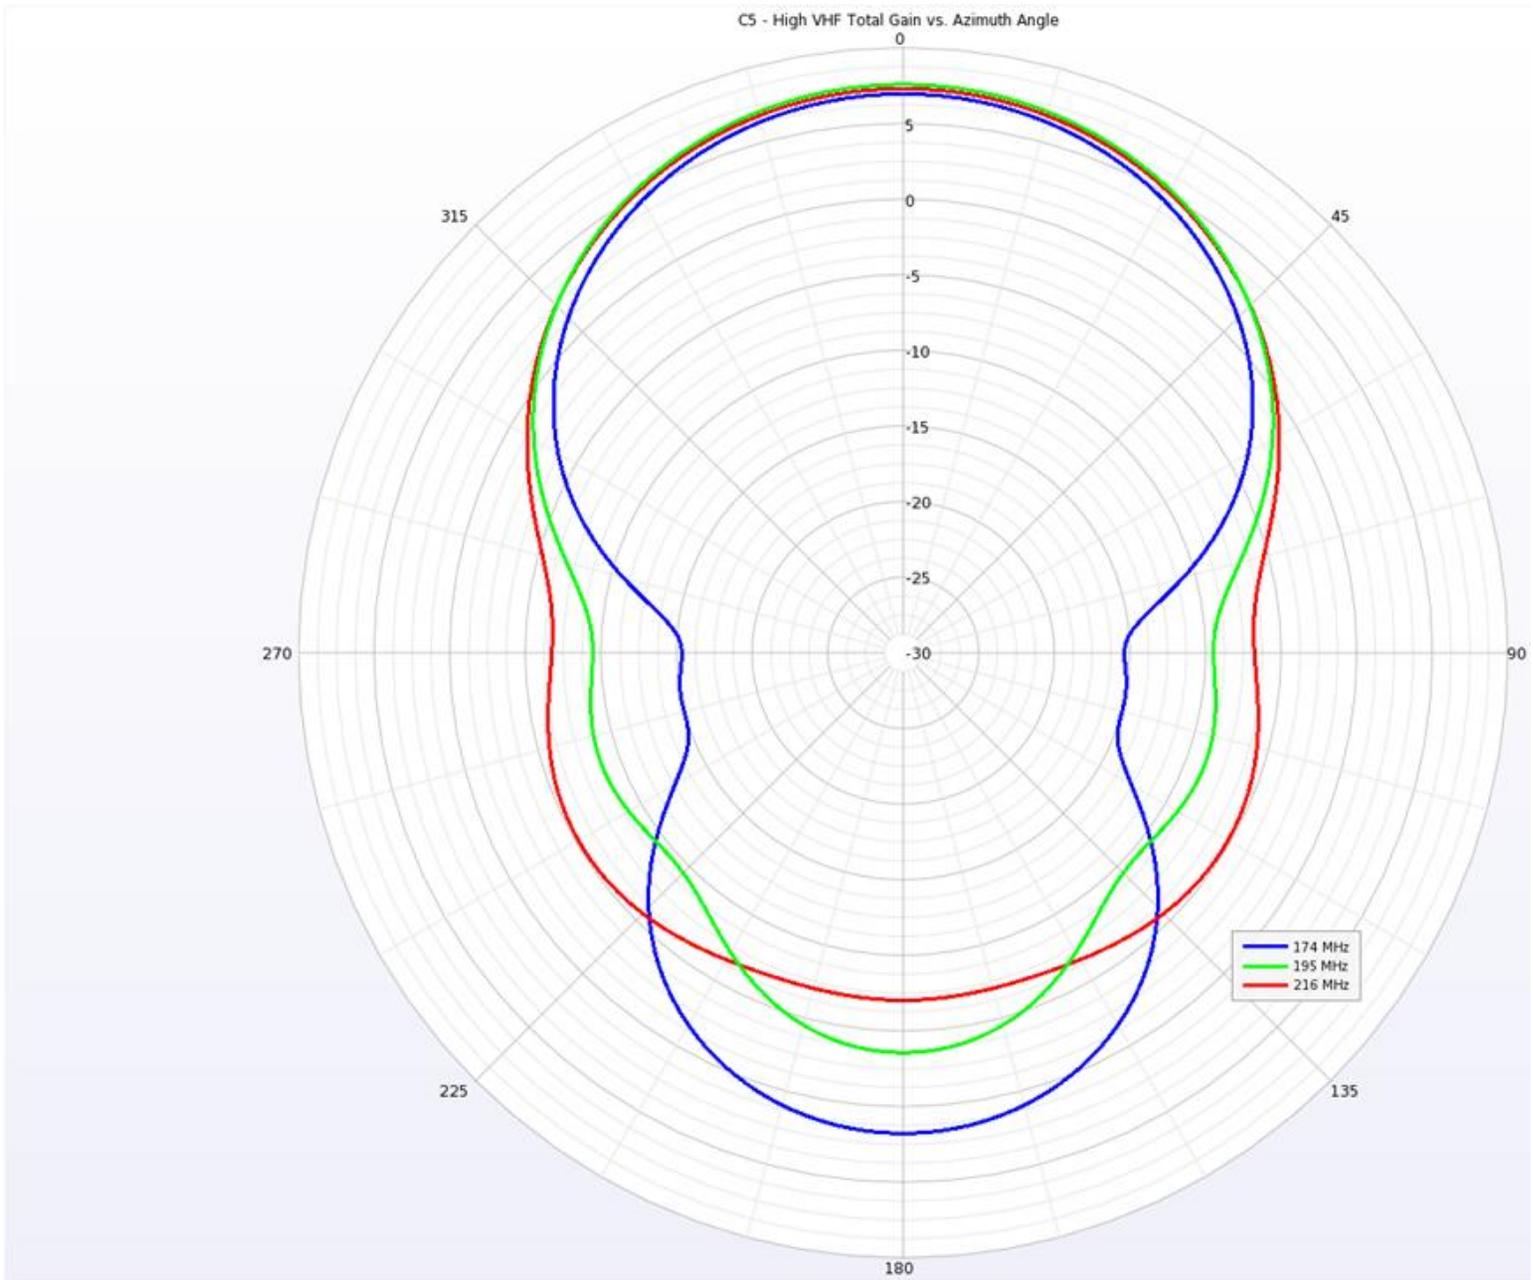


Illustration 2: C5 - High VHF Total Gain versus Azimuth Angle.

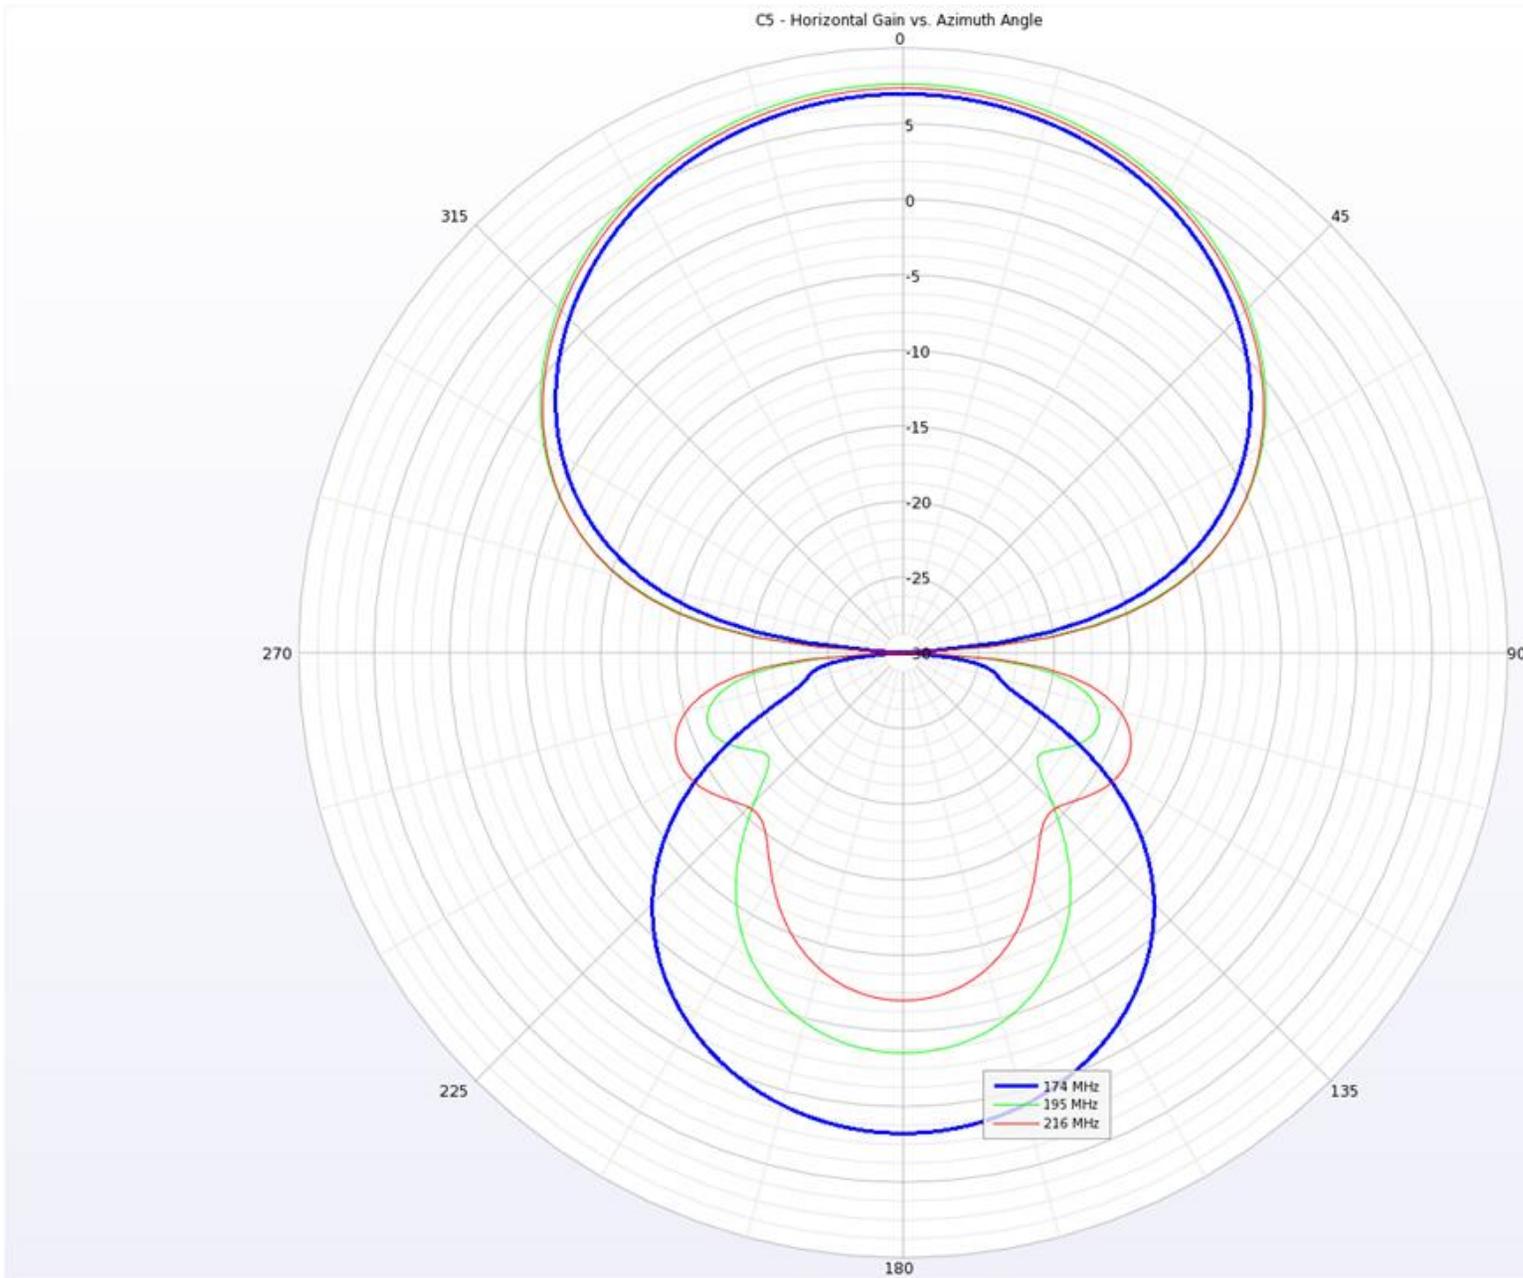


Illustration 3: C5 High VHF Horizontal Gain versus Azimuth Angle. Note: Side lobes lower than total gain of previous
 Copyright © Antennas Direct, Inc., 2010.

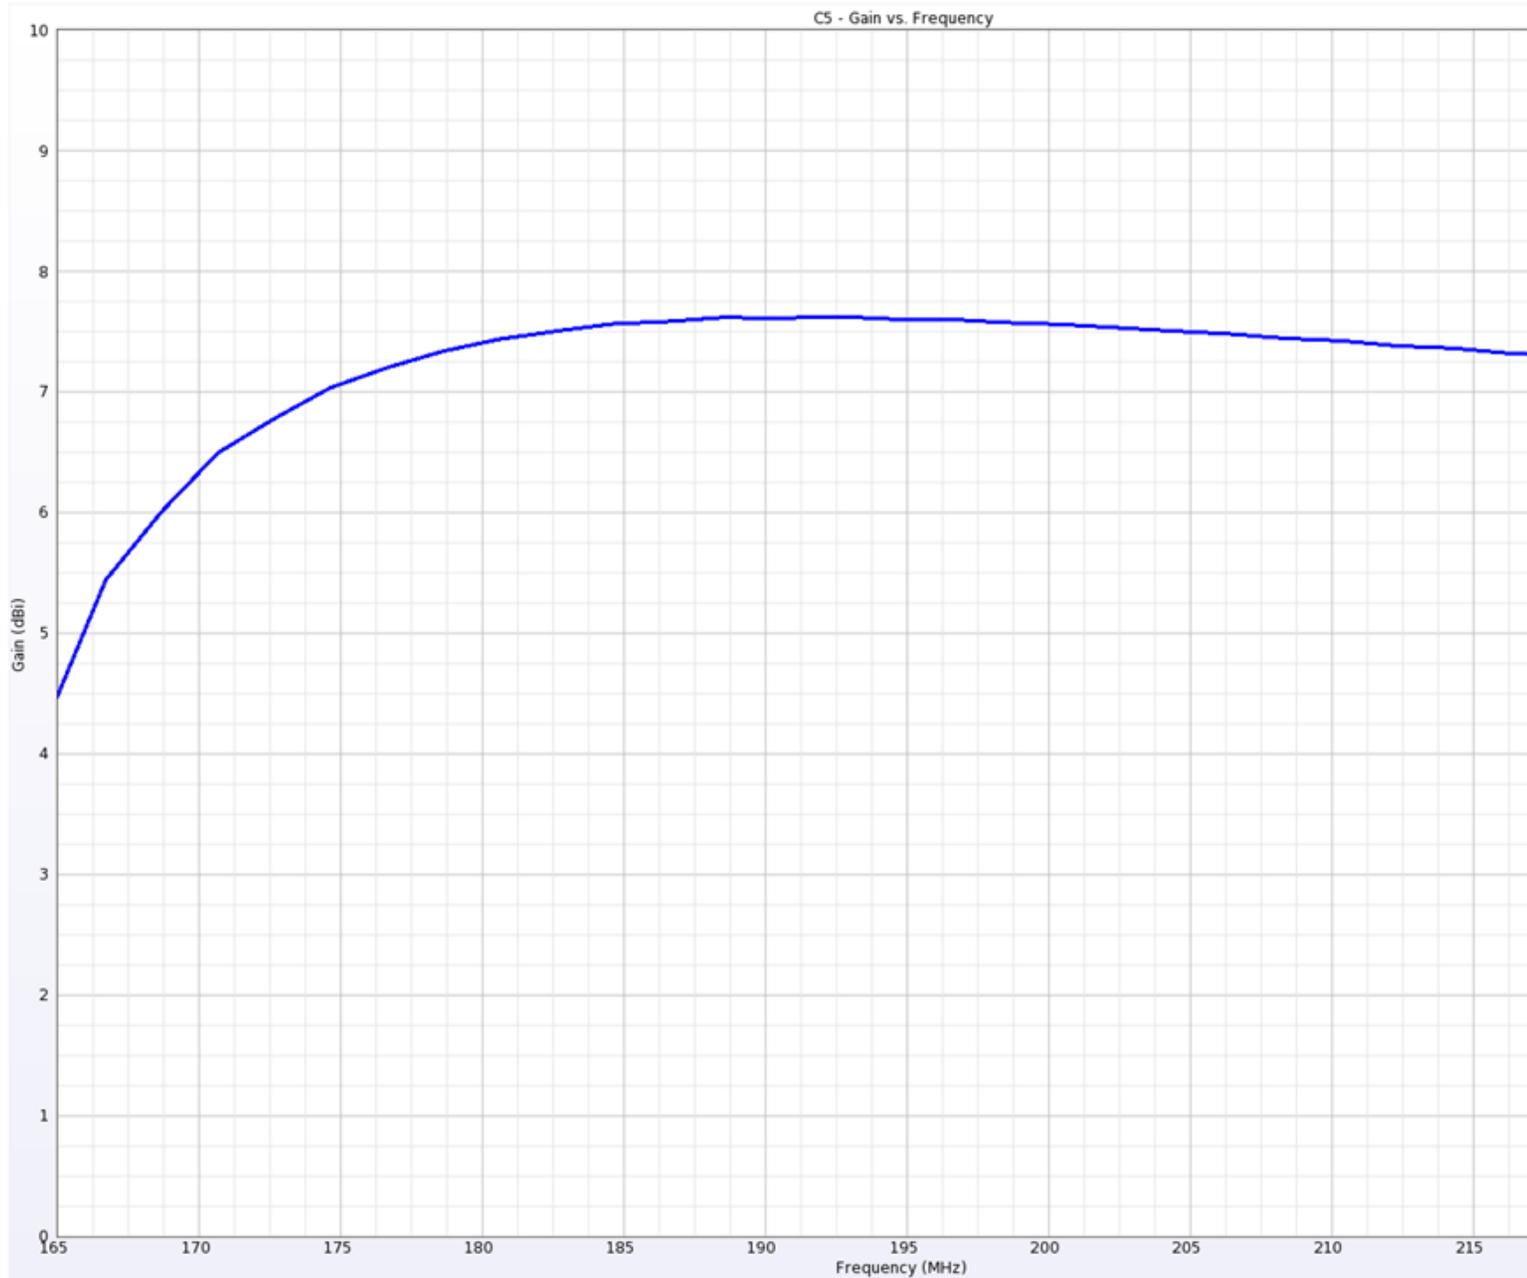


Illustration 4: C5 - Boresight Total Gain versus Frequency.

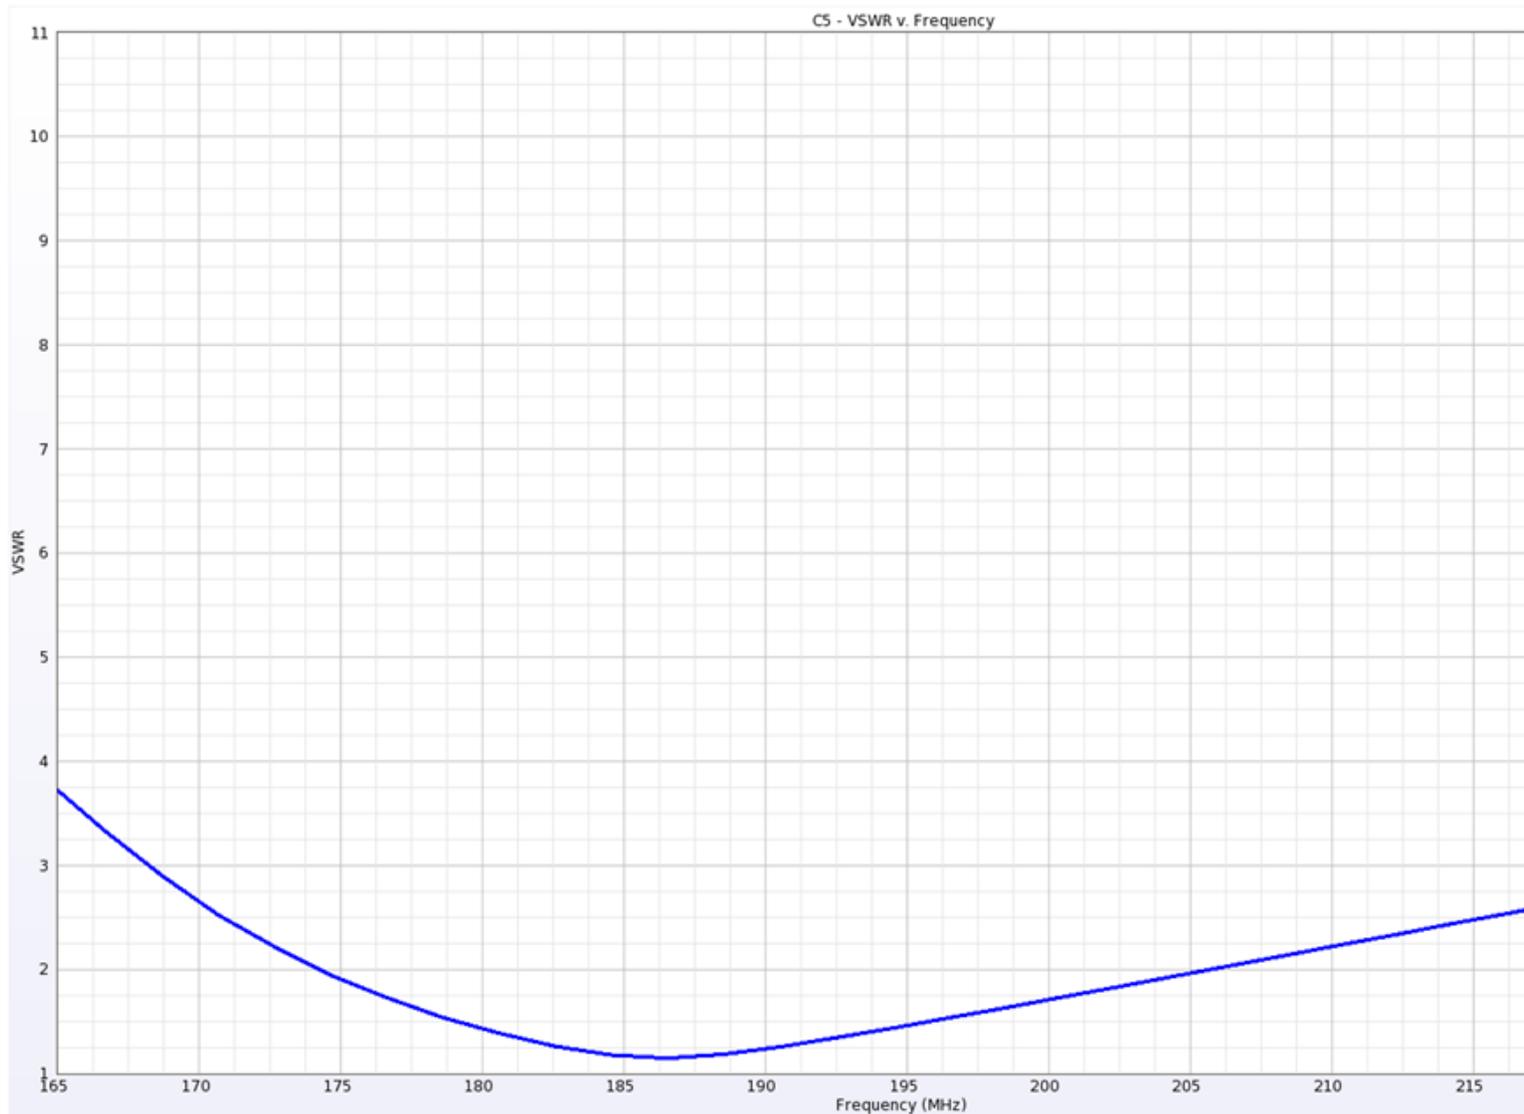


Illustration 5: C5 – Computed VSWR versus Frequency. Balun neglected. Assume 300 ohm line impedance.

C5

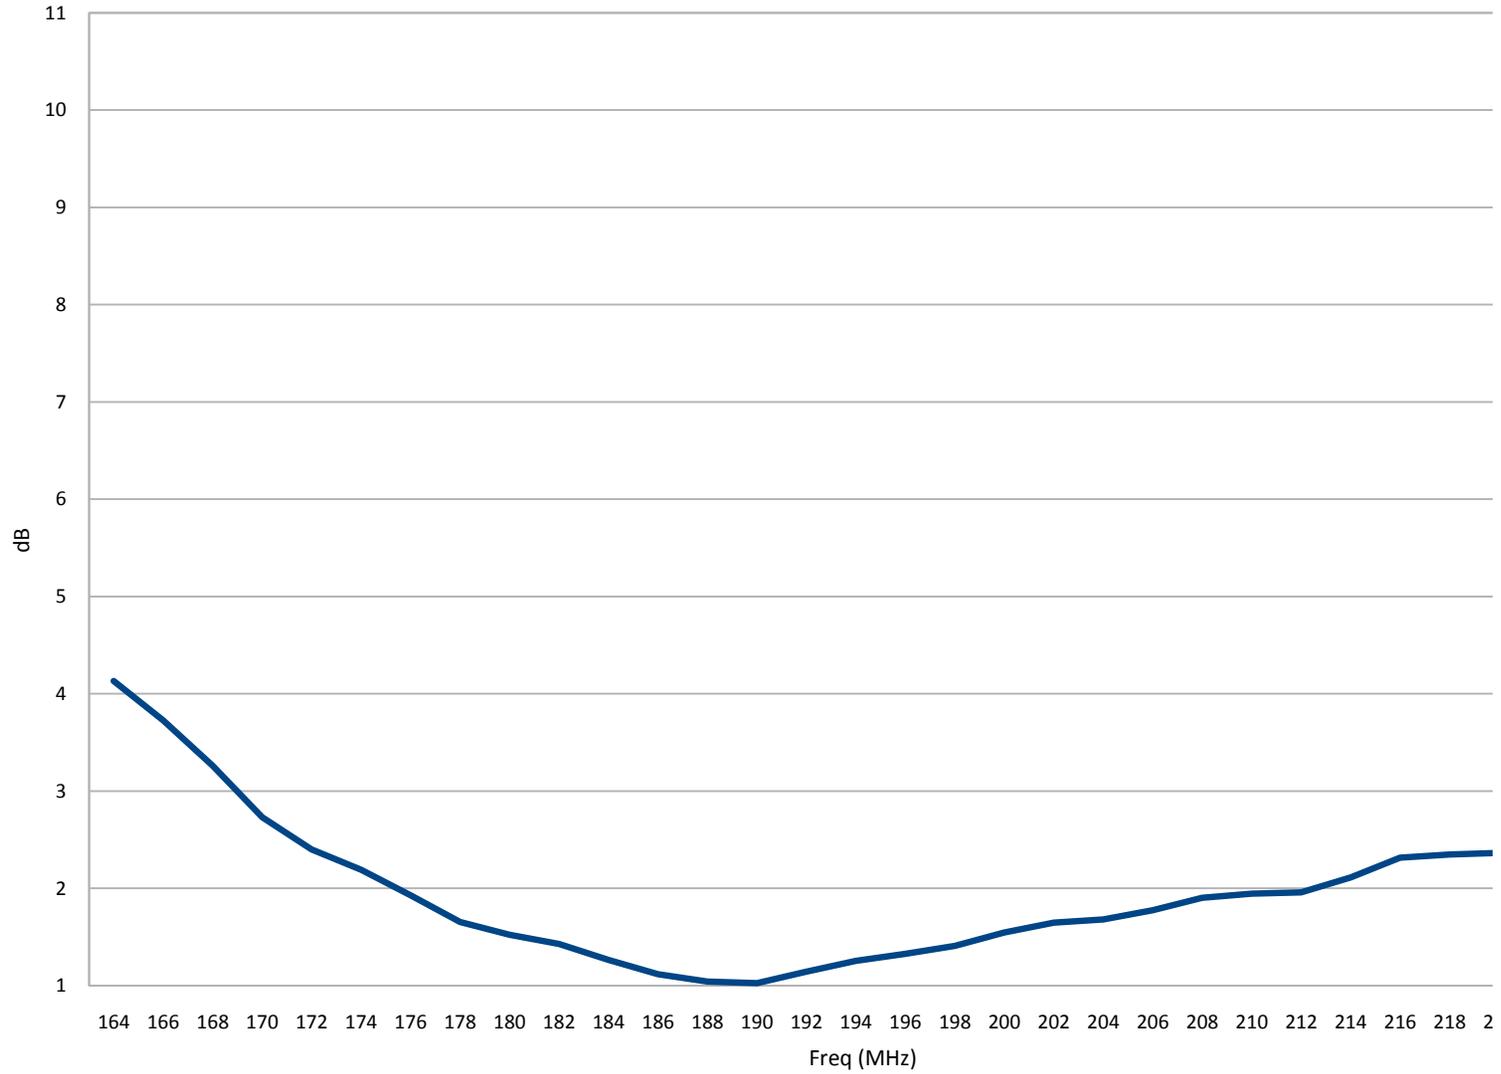


Illustration 6: C5 - VSWR versus Frequency measured using HP/Agilent 8510C VNA with antenna 10 ft above dry concrete.

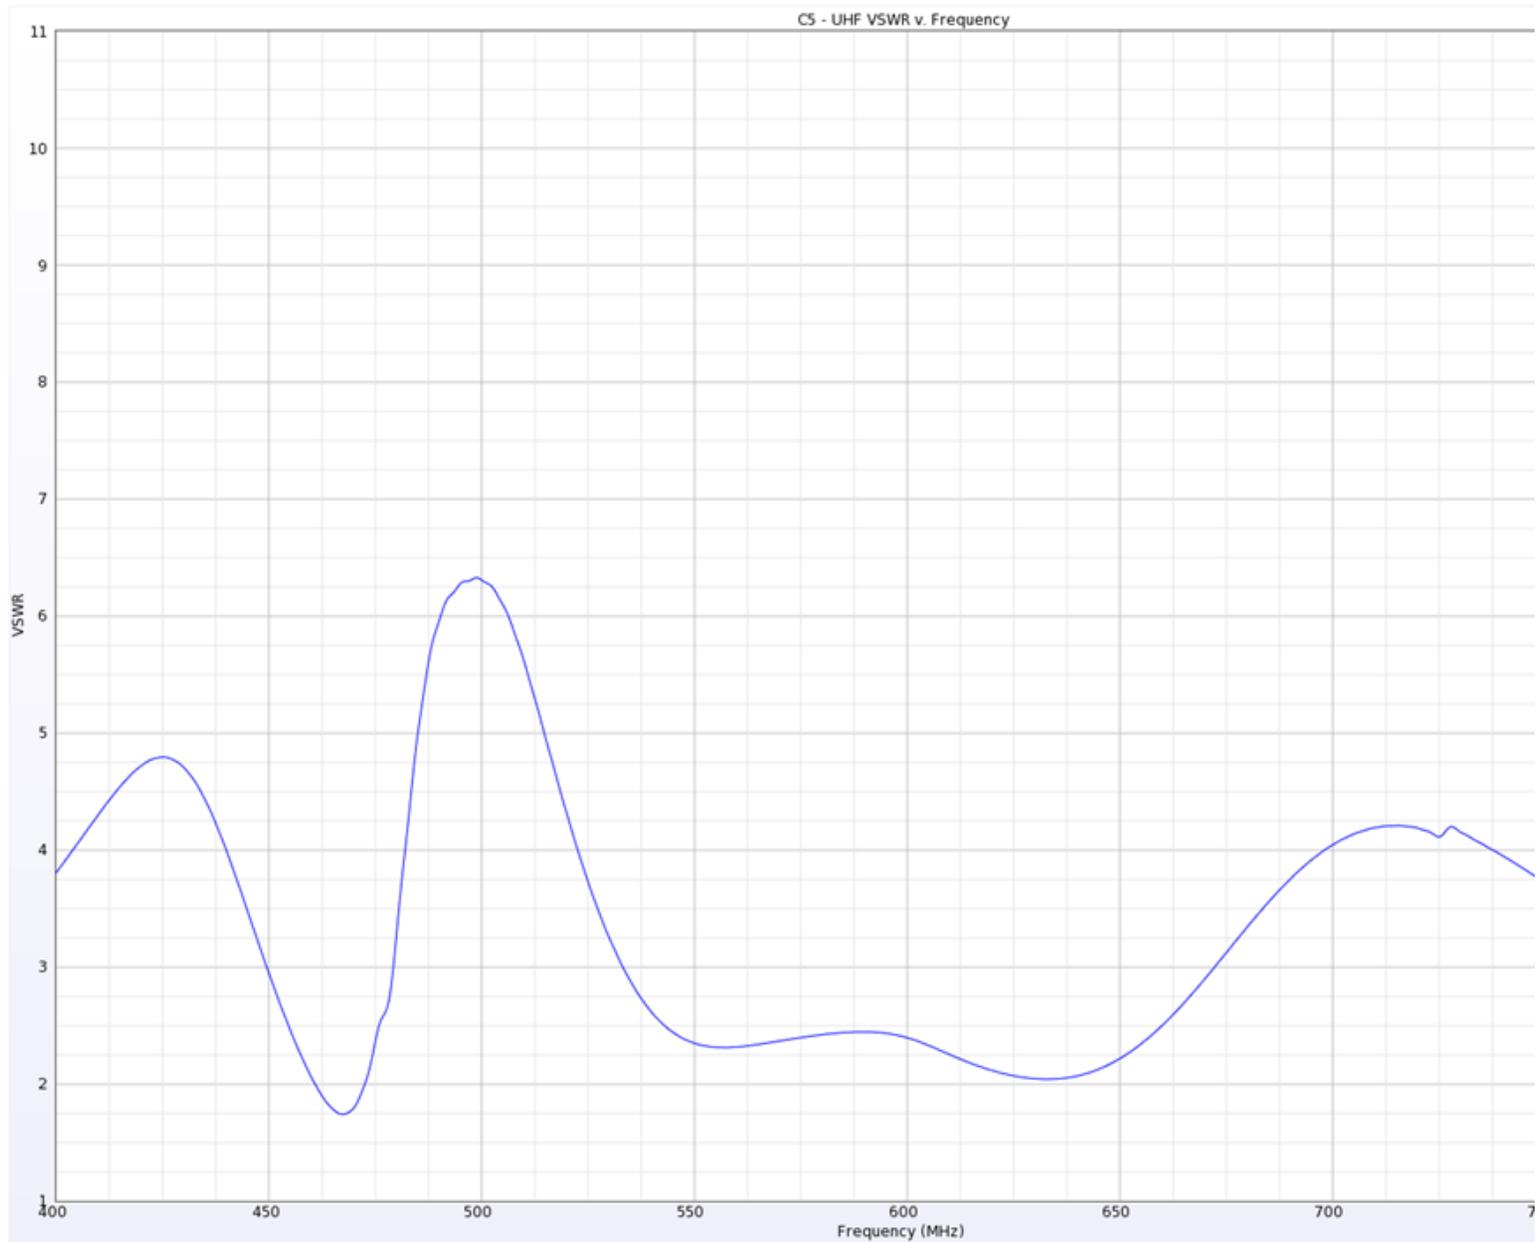


Illustration 7: C5 - Computed UHF VSWR versus Frequency. This is out of band response for this antenna.

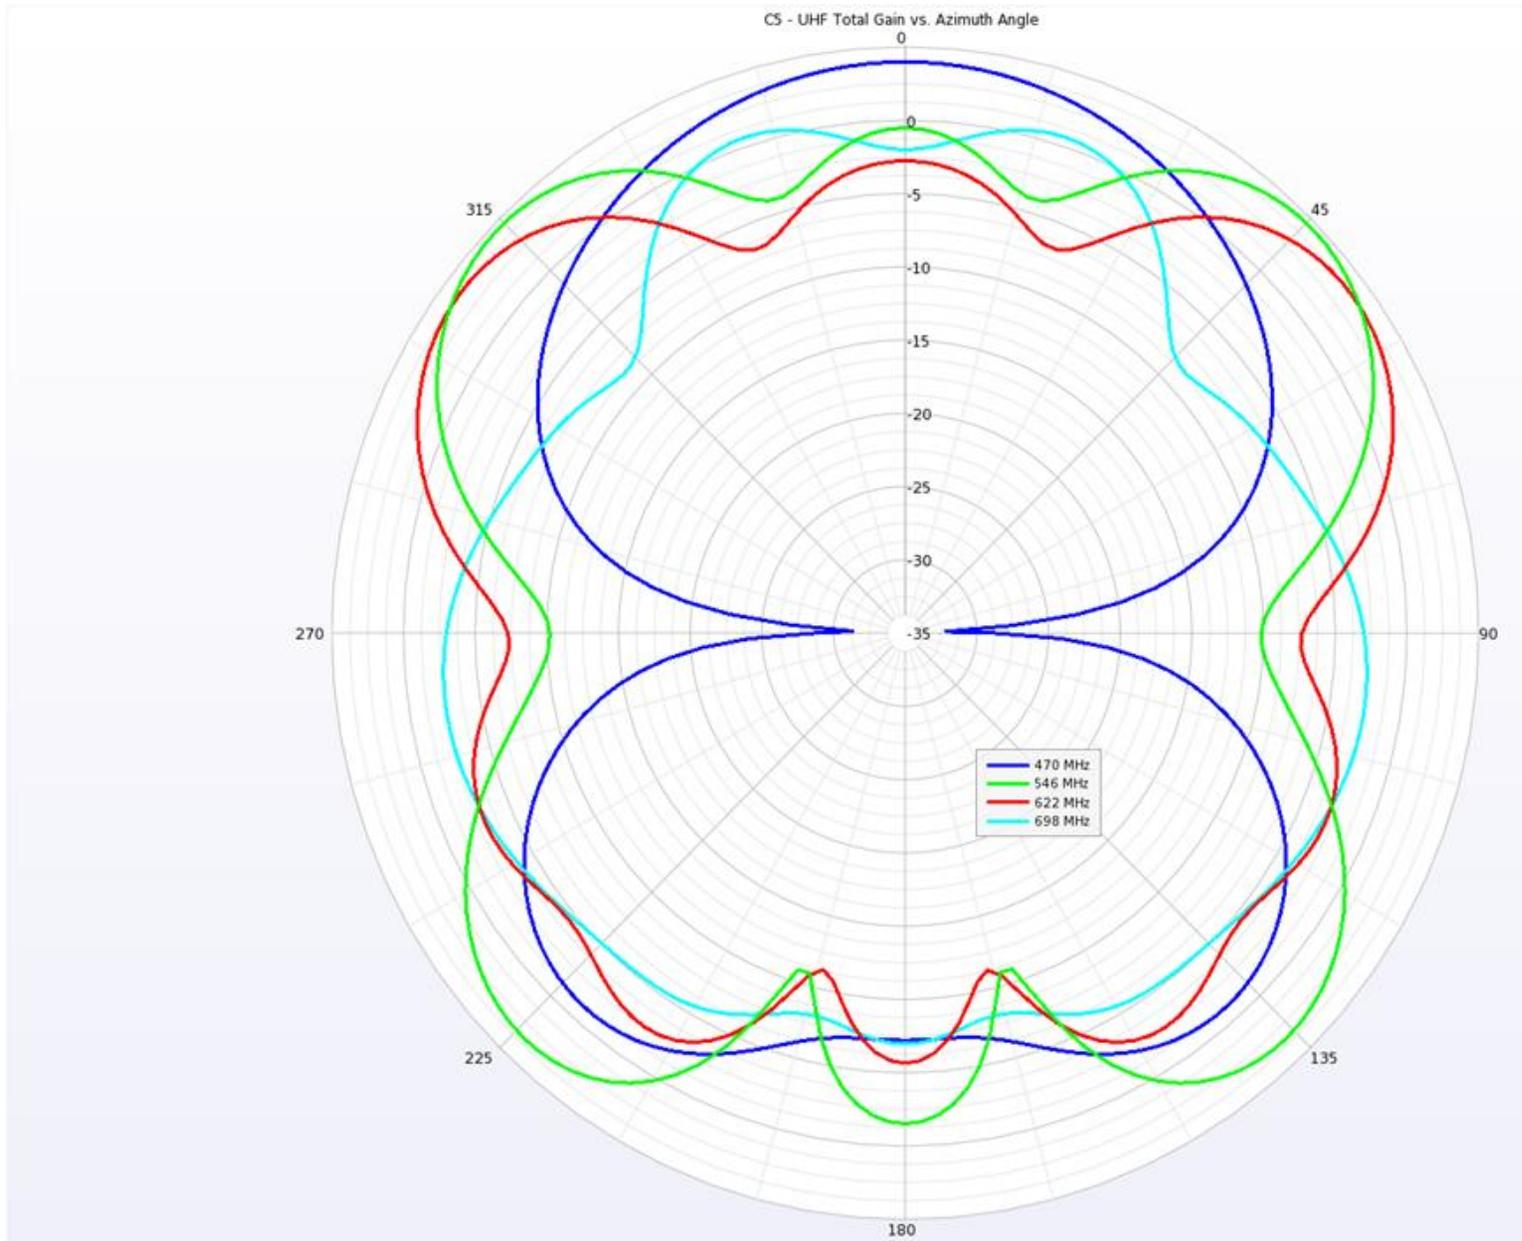


Illustration 8: C5 - UHF gain versus azimuth. Out of band response.